


TRILLER FIBER 1L

TRILLER LINE

www.ikedamaq.com.br



Articulated model allows curves of up to 15° to each side.

TRILLER FIBER 1L



The Triller Fiber 1L is ideal for routing optical fiber cables to interconnect 2 spots.

The Fiber Triller is an implement that in one operation performs 3 jobs:

- 1 - Opens a furrow in the soil with adjustable depth of 80 to 110 cm;
- 2 - Installs fiber optic cables up to Ø13 mm in diameter at the bottom of this furrow evenly and in a homogeneous way;
- 3 - The furrow is naturally closed by the returning of the removed soil.


In its major work depth, it needs tractors with 220 hp, obtaining work speed of up to 4 km/h.

Its vertical rod cuts through the soil and removes the furrow wall laterally.

This rod's special design allows the hose routing in its inner part, releasing the furrow bottom. The UHMW Polyethylene shank side cover slides the soil with little resistance and after its passage, the furrow side walls return, closing it immediately, retaining the cable at its deepest portion.

The hose routing in the rod inner part is ensured by guide pulleys of nylon technil, installed between the two lateral handles.

The reel support is designed to accommodate rolls up to 3000 meters in length.

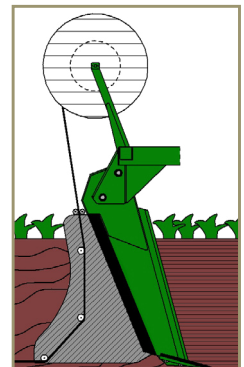

| Model | Type | Work Depth | Safety | Weight | Power Minimum |
|------------------------------|------|--------------|-----------|---------|---------------|
| Triller Fiber 1L | Drag | 80 to 110 cm | Bolt-Fuse | 970 kg | 220 hp |
| Triller Fiber Articulated 1L | Drag | 80 to 110 cm | Bolt-Fuse | 1120 kg | 220 hp |